




BFS-F1002 Fusion Splice Sleeve - 60mm

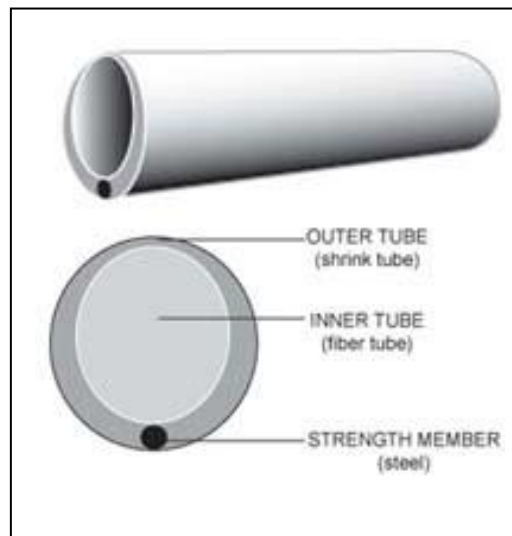

Fiber Optic Fusion Splice Sleeve Operating Temperature
-45~100 °C

Fiber Optic Splice Sleeves Shrinking Temperature Range
90 ~ 110 °C

Fiber Optic Splice Sleeve Technical Data
Properties Test Method Typical Data
Tensile Strength (MPa) ASTM D 2671 18
Ultimate Elongation (%) ASTM D 2671 700
Density(g/cm²) ISO R1183D 0.94
Dielectric Strength (KV/mm) IEC243 20
Dielectric Constant IEC243 2.5
Longitudinal Change (%) ASTM D 2671 ±5